


# Superglass Hex

Edition: 14/04/2018

## COMPOSITION

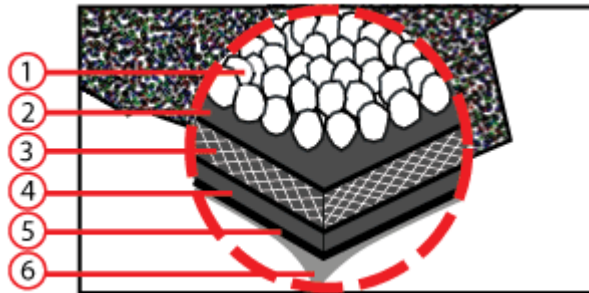

1. Coloured granules
2. Top coating oxidized bitumen
3. Saturated glass mat
4. Back coating oxidized bitumen
5. Self adhesive coating
6. Release film


## FIELD APPLICATION

Roofing material for commercial and Residential constructions with a roof pitch between 15° and 90°.

## COLOURS

- |                     |                       |
|---------------------|-----------------------|
| 01 Black            | 03 Amazon green       |
| 07 Dual Brown       | 10 Red                |
| 20 Tile Red Ultra   | 23 Amazon Green Ultra |
| 27 Dual Brown Ultra |                       |

## DIMENSIONS

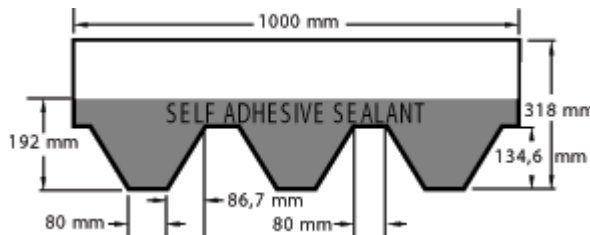

<b>Length</b>	1000 mm (+/- 3)
<b>Width</b>	318 mm (+/- 3)
<b>Weight</b>	+/- 7,7 kg/m <sup>2</sup>
<b>Coverage/bundle</b>	3 m <sup>2</sup>
<b>Schingles/bundle</b>	22
<b>Bundles/palet</b>	45

## TECHNICAL INFORMATION

	<i>Tensile strength</i>		<i>Elongation</i>		<i>Nail tear</i>
	<i>Length</i>	<i>Width</i>	<i>Length</i>	<i>Width</i>	
<i>Minimum</i>	≥ 600N	≥ 400N	≥ 2,5%	≥ 2,5%	≥ 100N
<i>Average value</i>	750N	475N	3,0%	3,0%	125N

### Granule adhesion

Max. 1,2gr/m<sup>2</sup>